



SANSHENG
SENSOR




Product Selection Guide

SHC 80.1 Applications & Features

All-metal housing design, durable, high reliability.
Metal gear, with good rotating hand feeling.
Line driver output ensures strong anti-jamming capability.
Used For CNC machine origin correction.
Black metal housing optional.



Mechanical Drawing

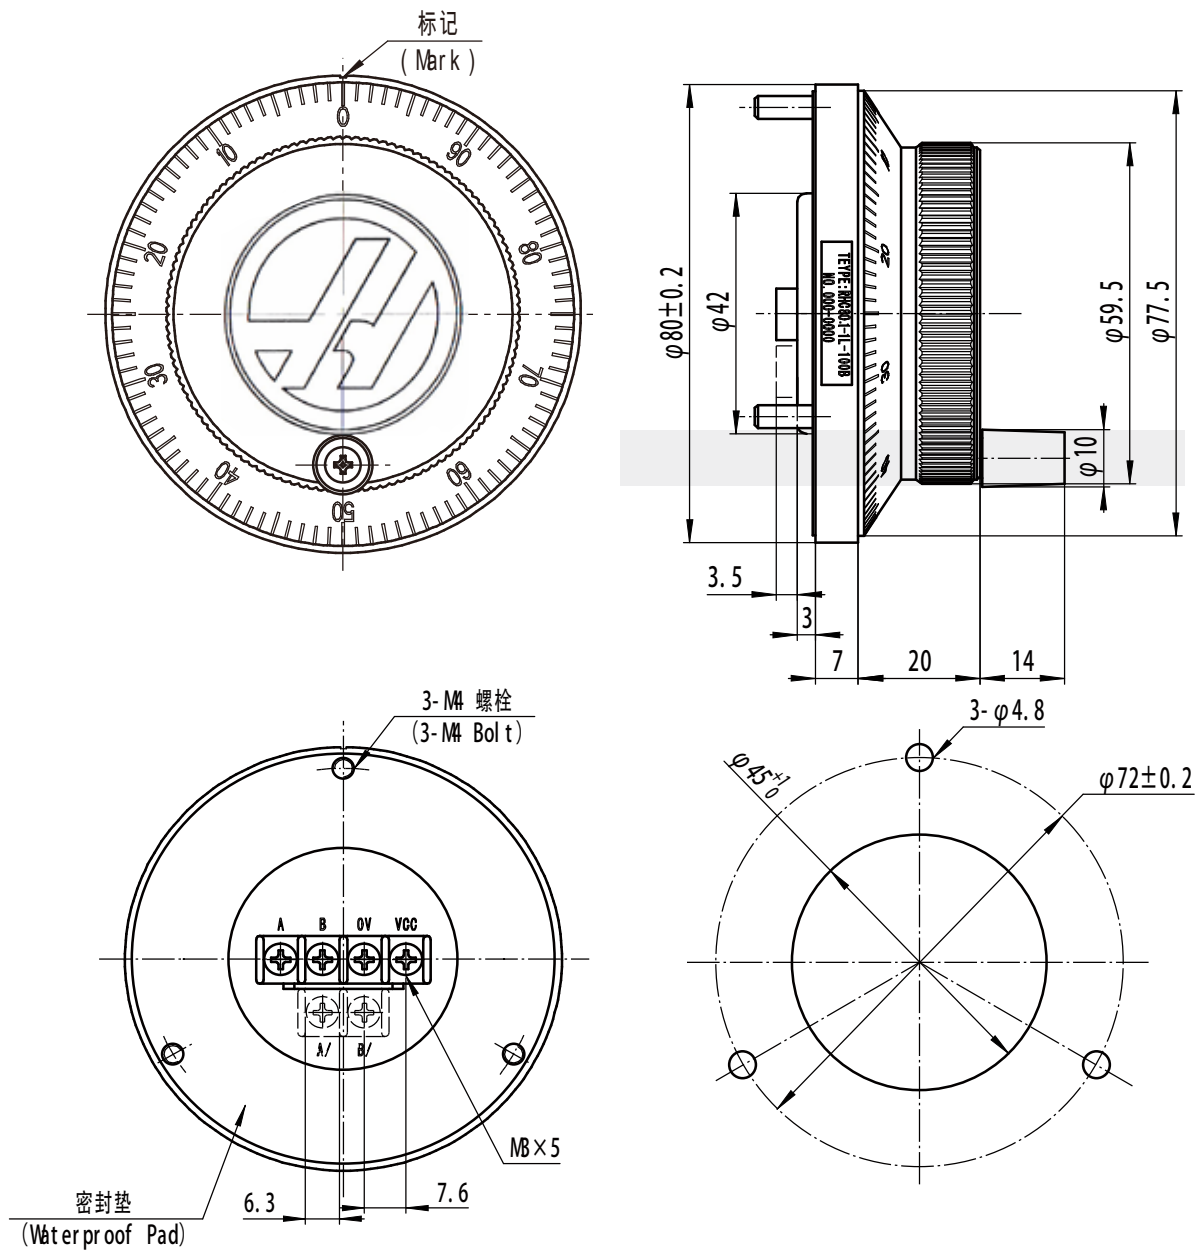

Electrical Specifications


Output Circuit	Supply Voltage DC (V)	Current Requirement (mA)	Output Voltage (V)		Rise Time (ns)	Fall Time (ns)	Frequency Response (kHz)
			V _H	V _L			
E (Voltage)	5 ± 0.25	≤ 80	> 3.5	≤ 0.7	≤ 500	≤ 100	0-100
	8-26	≤ 120	> VCC-2.5	≤ 0.7	≤ 500	≤ 100	0-100
F (Push-pull)	5 ± 0.25	≤ 80	> 3.5	≤ 0.7	≤ 500	≤ 100	0-100
	8-26	≤ 120	> VCC-2.5	≤ 0.7	≤ 500	≤ 100	0-100

C (Open Collector)	5 ± 0.25	≤ 60	$> V_{CC} - 2.5$	≤ 0.7	≤ 500	≤ 100	0-100
	8-26						
L (Line Driver)	5 ± 0.25	≤ 100	> 3.5	≤ 0.7	≤ 200	≤ 200	0-100
A (Wide Voltage Line Driver)	8-26	≤ 60	$> V_{CC} - 2.5$	≤ 0.7	≤ 500	≤ 100	0-100

Enviromental Specifications


Max. Speed	600r/min
Operating Temp.	$-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$
Store Temp.	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
Size	60mm
Weight	Approx. 0.215kg

Output Circuits

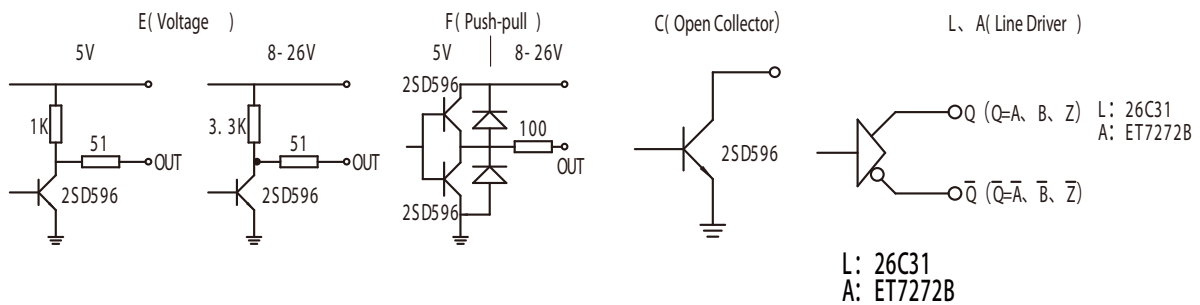


Note: C,F output is shorted to ground protection diode

Output Waveform



Waveform for C, E, F output



Waveform for L, A output

Wave Ratio : $X_1 + X_2 = 0.5T \pm 0.1T$
 $X_2 + X_3 = 0.5T \pm 0.1T$



Phase Different : $X_n \geq 0.125T$ ($n=1, 2, 3, 4$)

Absolute Angle Error $\leq 0.2T$

Cycle Error : $\leq 0.05T$

$T = 360^{\circ} / N$ (N =lines count per revolution)

Order Information

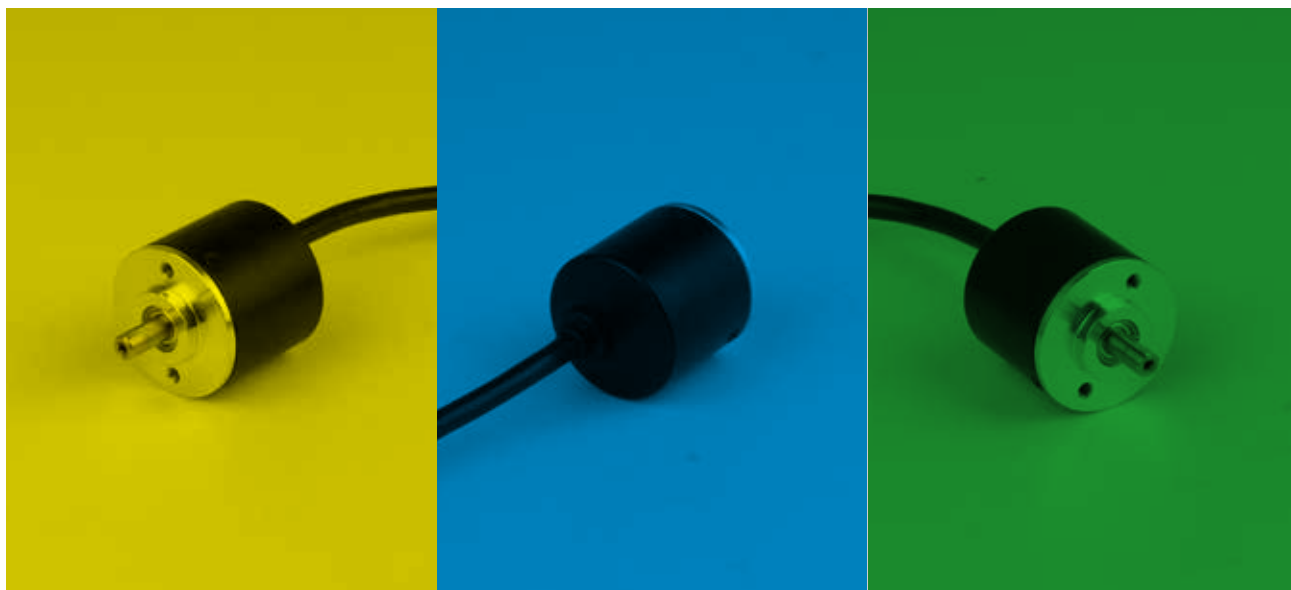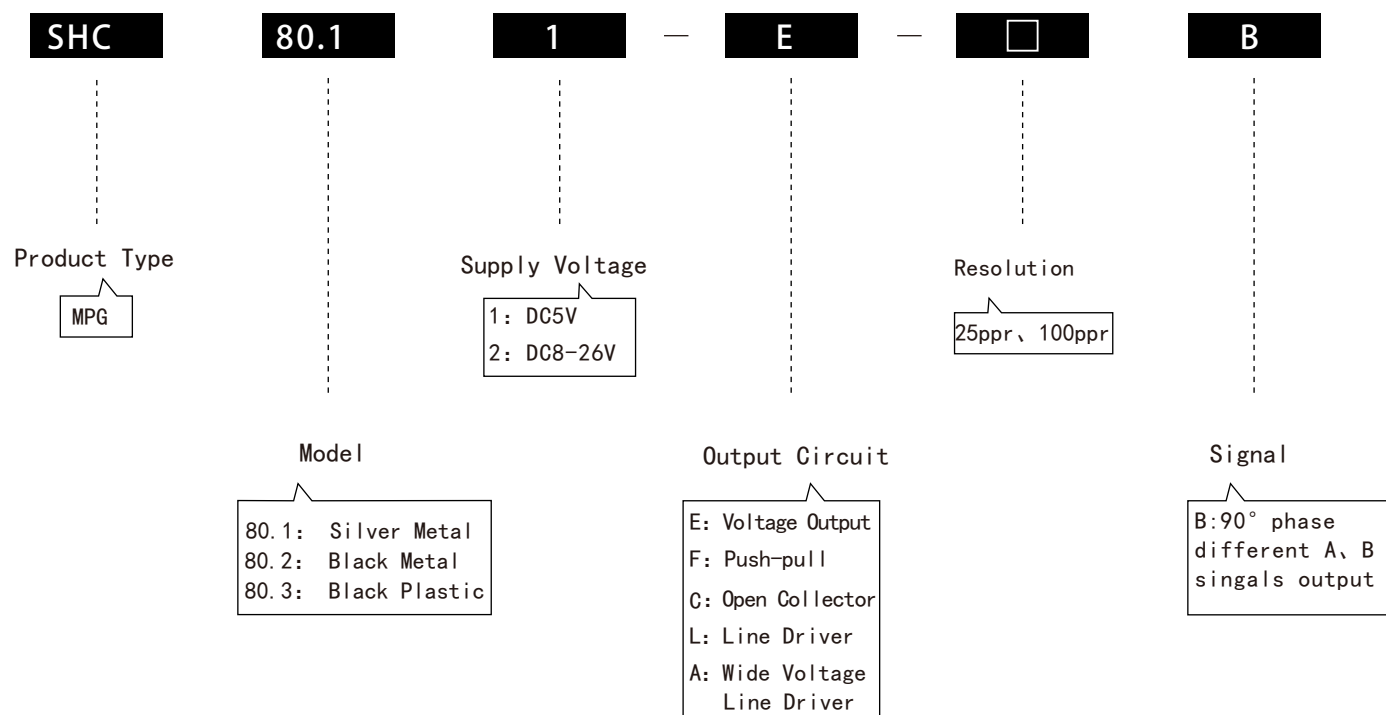

TEL:86-0431-81857464

Skype:zhangpaula312

WhatsApp:+86 13804324526

Email:paulazhang@san-sheng.net



**SANSHEG
SENSOR**

JILIN SANSHEG SENSING TECHNOLOGY CO,LTD

No 191,Chaoqun Street, High-tech Development District,
Changchun 130012,China.