



SANSHENG
SENSOR




Product Selection Guide

SSB Applications & Features

New design, easy to move.
All-plastic housing, anti-oil, sealed.
With axis selection switch and resolution switch.
Emergency stop switch and reset switch optional.
Used for CNC machine tools and printing machinery.



Mechanical Drawing

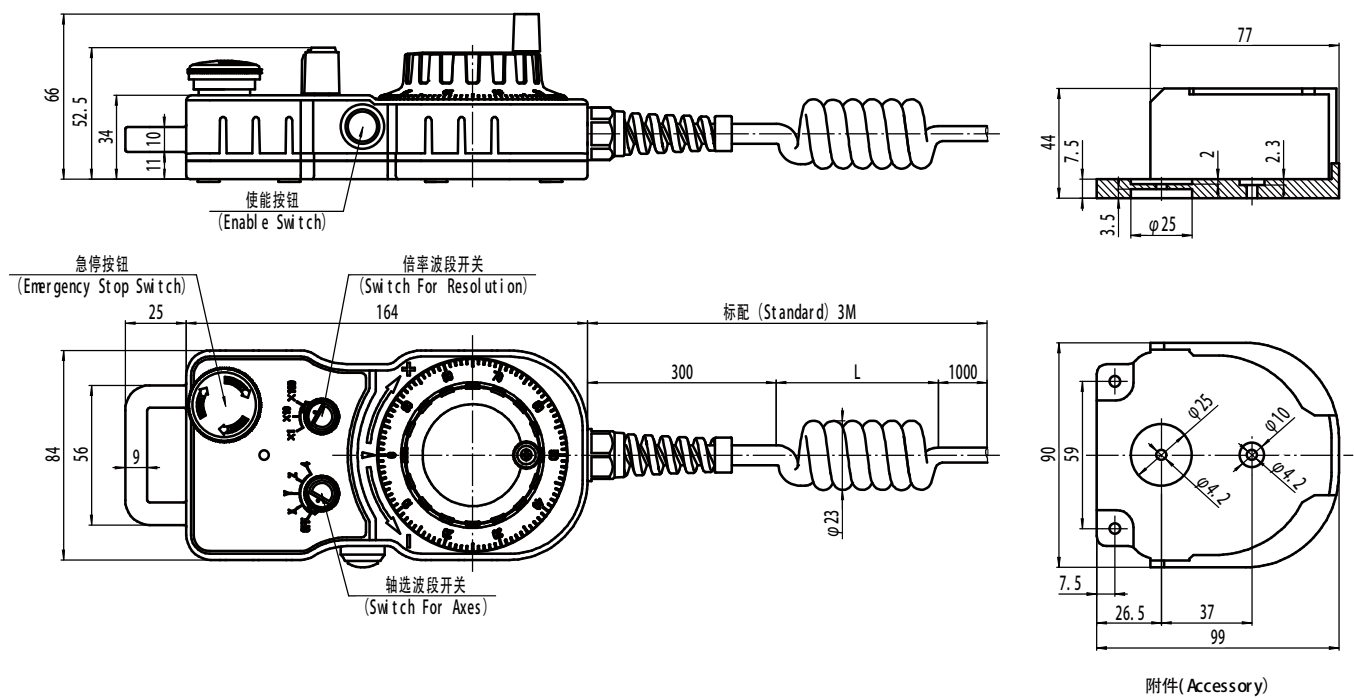


Electrical Specifications

Output Circuit	Supply Voltage DC (V)	Current Requirement (mA)	Output Voltage (V)		Rise Time (ns)	Fall Time (ns)	Frequency Response (kHz)
			V_H	V_L			
E (Voltage)	5 ± 0.25	≤ 60	≥ 3.5	≤ 0.5	≤ 500	≤ 100	0~100
	8~26		$\geq V_{CC}-2.5$	≤ 0.5	≤ 1500	≤ 300	
C (Open Collector)	5 ± 0.25	≤ 60					0~100
	8~26						
L (Line driver)	5 ± 0.25	≤ 100	≥ 2.5	≤ 0.5	≤ 200	≤ 200	0~100
A (Wide Voltage Line Driver)	8~26	≤ 80	$\geq V_{CC}-2.5$	≤ 0.8	≤ 800	≤ 200	0~100
F (Push Pull)	5 ± 0.25	≤ 60	≥ 3.5	≤ 0.8	≤ 300	≤ 200	0~100
	8~26		$\geq V_{CC}-2.5$	≤ 1.0	≤ 500	≤ 200	



Enviromental Specifications

Max. Speed	600r/min
Operating Temp.	-10~+60°C
Store Temp.	-20~+70°C
Size	189*84*66mm
Weight	Approx. 0.66kg

Output Circuits

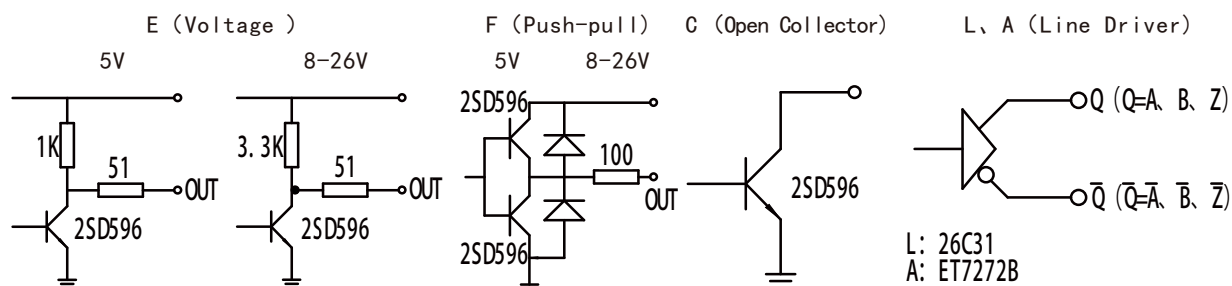

Output Waveform

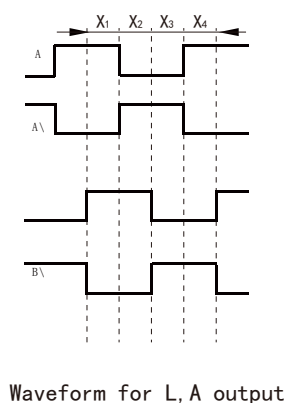

Wave Ratio : $X1+X2=0.5T \pm 0.1T$
 $X2+X3=0.5T \pm 0.1T$

Phase Different : $Xn \geq 0.125T$ ($n=1, 2, 3, 4$)

Absolute Angle Error: $\leq 0.2T$

Cycle Error : $\leq 0.05T$

$T=360^\circ / N$ (N =lines count per revolution)

Electrical Connections

17 Pins Cable Wire, 4 Axis

Cable Color	DBU	LBU	RD/BK	BU/BK	RD	BK	YL	WH	CR	GY	CR/BK	GN	OG	BN	PK	PL
L	4	COM	+L	-L	VCC	OV	A	B	X1	X10	X100	X	Y	Z	A/	B/
E	4	COM	+L	-L	VCC	OV	A	B	X1	X10	X100	X	Y	Z	/	/

21 Pins Cable Wire, 4 Axis with Emergency Stop Button

Cable Color	GY	GY/BK	WH/BK	LBU	GN	BN	BN/BK	OG	RD/BK	BU/BK	RD	BK	YL	WH	YL/BK	OG/BK	GN/BK	PL/BK	PK	PL
L	X1	X10	X100	COM	X	Z	4	Y	+L	-L	VCC	OV	A	B	K1	K2	K3	K4	A/	B/
E	X1	X10	X100	COM	X	Z	4	Y	+L	-L	VCC	OV	A	B	K1	K2	K3	K4	/	/

17 Pins Cable Wire, 6 Axis, Voltage Output

Cable Color	DBU	LBU	RD/BK	BU/BK	RD	BK	YL	WH	CR	GN/BK	CR/BK	GN	OG	BN	PK	PL
E	4	COM	+L	-L	VCC	OV	A	B	X1	X10	X100	X	Y	Z	5	6

21 Pins Cable Wire, 6 Axis, Line Driver Output

Cable Color	GY	GY/BK	WH/BK	LBU	GN	BN	BN/BK	OG	RD/BK	BU/BK	RD	BK	YL	WH	YL/BK	OG/BK	PK	PL
L	X1	X10	X100	COM	X	Z	4	Y	+L	-L	VCC	OV	A	B	5	6	A/	B/



21 Pins Cable Wire, 6 Axis with Emergency Stop Button, Voltage Output

Cable Color	GY	GY/BK	WH/BK	LBU	GN	BN	BN/BK	OG	RD/BK	BU/BK	RD	BK	YL	WH	YL/BK	OG/BK	GN/BK	PL/BK	PK	PL
E	X1	X10	X100	COM	X	Z	4	Y	+L	-L	VCC	OV	A	B	K1	K2	K3	K4	5	6

24 Pins Cable Wire, 6 Axis with Emergency Stop Button, Line Driver Output

Cable Color	CR	CR/WH	WH/BK	LBU	WH/RD	WH/BU	GN	OG	BN	DBU	GY	WH/GY	YL	WH	BK	RD	WH/YL	WH/OG	WH/GN	WH/PL	PK	PL
L	X1	X10	X100	COM	+L	-L	X	Y	Z	4	5	6	A	B	OV	Vcc	K1	K2	K3	K4	A/	B/

Order Information

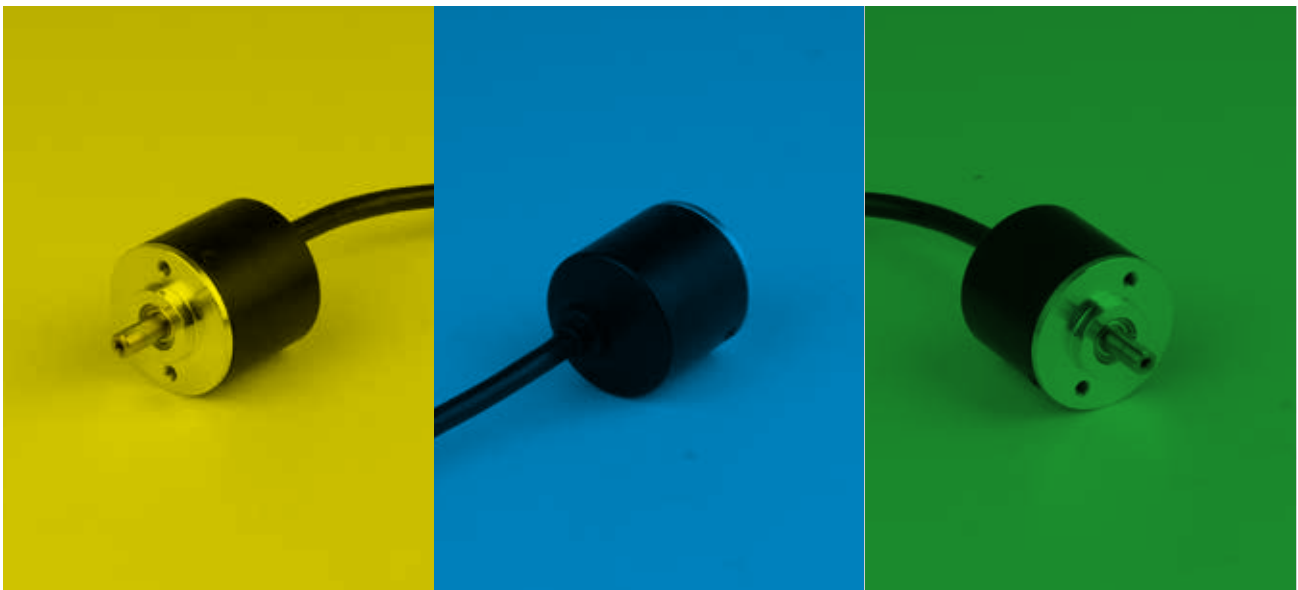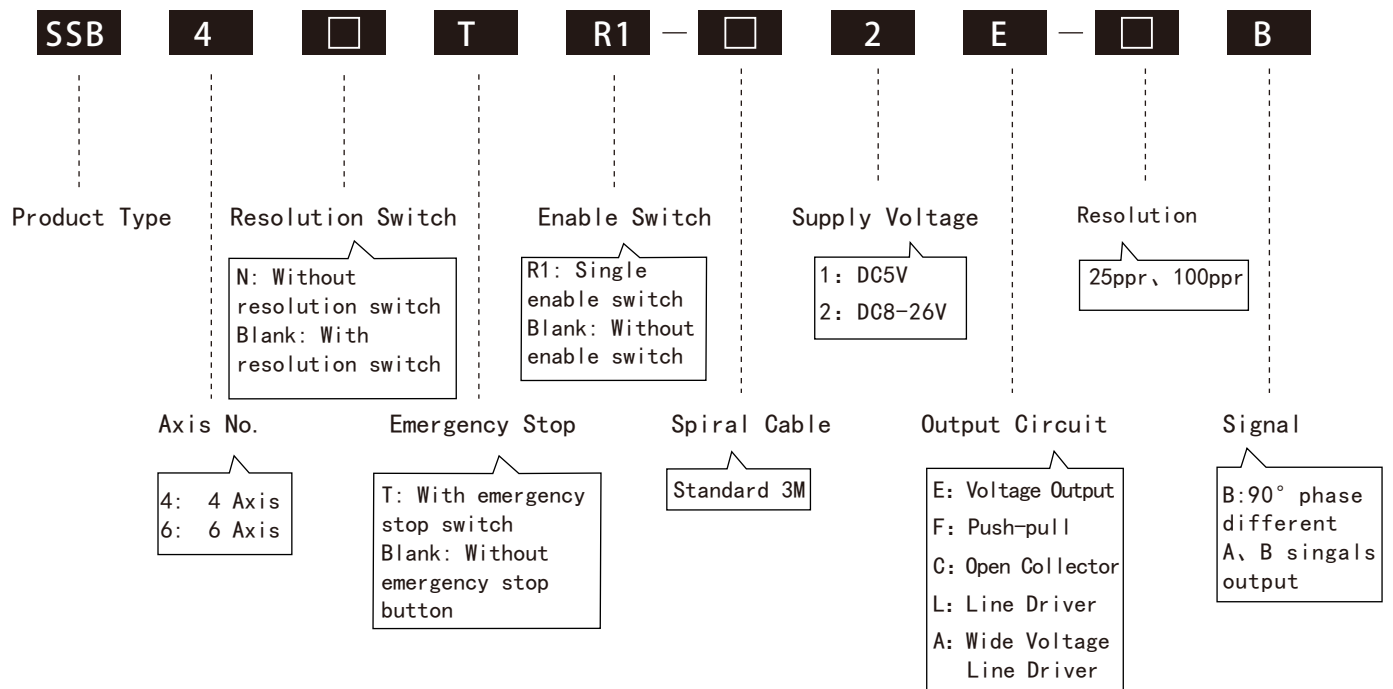

TEL:86-0431-81857464

Skype:zhangpaula312

WhatsApp:+86 13804324526

Email:paulazhang@san-sheng.net



**SANSHEG
SENSOR**

JILIN SANSHEG SENSING TECHNOLOGY CO,LTD

No 191,Chaoqun Street, High-tech Development District,
Changchun 130012,China.